

# TECHNICAL SPECIFICATION SHEET

**ZS-HFP002CBF**



The hands free pulls should be installed with the opening part towards the leading edge of the door.

The product shape is designed in order that the arm naturally moves free from the pull as the door opens.

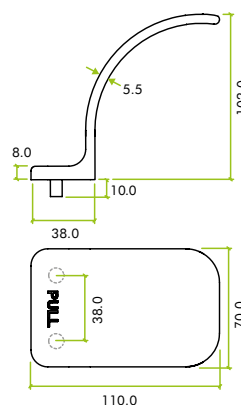
Installation is recommended at approx. 1.5m from floor level where the action is more natural at a higher point on the door than standard pull handle hardware.




CODE	FINISH
ZS-HFP002CBF-SSS	Satin Stainless

## SPECIFICATION

- Grade 304 stainless steel
- Cast body
- Bolt-fix
- Operated by the forearm
- Reduces contact with hands
- Reduces the spread of germs, bacteria, viruses and infection
- Can be installed instead of or as well as traditional pull handle hardware
- 2x M4x60MM bolts
- Can be paired with face-fix version to make a back-to-back set where pulls are required on both sides of the door

## TECHNICAL



CODE	DESCRIPTION	ADDITIONAL INFO.
ZS-HFP002CBF-SSS	Hands free pull - Cast body - Bolt-fix	Grade 304 stainless steel
	<p><b>For more information please contact us today:</b>                      Zoo Hardware, Unit B, Dukes Drive,                      Kingmoor Park North, Carlisle, Cumbria CA6 4SH</p> <p><b>Call: 01228 672900</b>  <b>Fax: 01228 672928</b>  <b>Email: sales@zoo-hardware.co.uk</b>  <b>Web: www.zoohardware.co.uk</b></p>	  <p>URS is a member of Registrar of Standards (Holdings) Ltd.</p>